

# AKOESTIEKLABEL





# SPACE S

- STANDARD
- VIDEO CONFERENCE

A peaceful and serene workspace,  
allowing maximum focus and minimal  
distraction. Now with video conference.



ISOLATION





LOW, MEDIUM  
& HIGH TONES

**MUTE.**

## SHAPE AND DIMENSIONS mm

+/- 3 mm

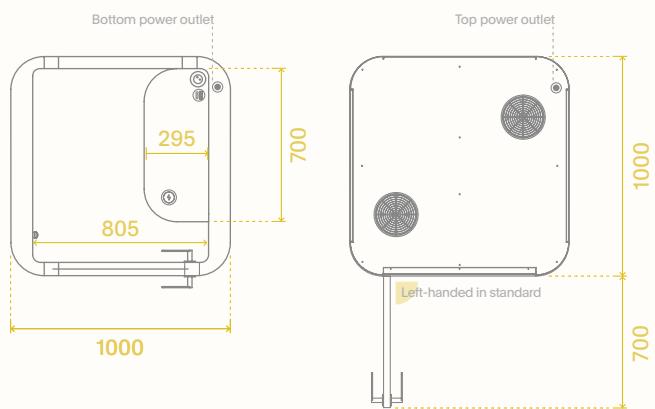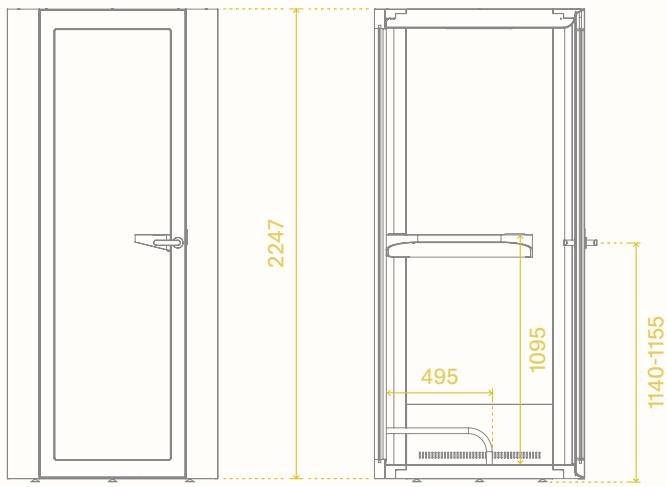

## DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	1000	1000 +700 mm with open door	2247 +20 mm for leveling
Internal	805	887	2080

## WEIGHTS kg

	NET	GROSS
	347	470 including wooden case and packaging parts

## COMPOSITION

The construction of Space S is the effect of work of our acoustics, technology and design departments. Walls of Space S pod are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials      • Felt      • Isolating materials
- Metal covers      • Plywood      • Soundproof glass


## USAGE

- Open space      • Call center      • Library
- Reception      • Breakout area
- Other public spaces (including railway stations and airports)


## CARE

- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

## AVERAGE SOUND INSULATION

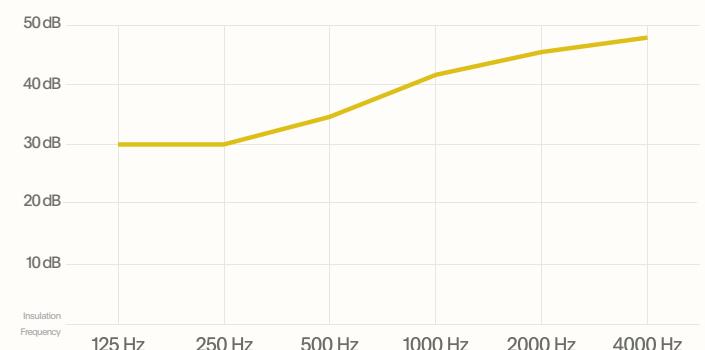


## RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

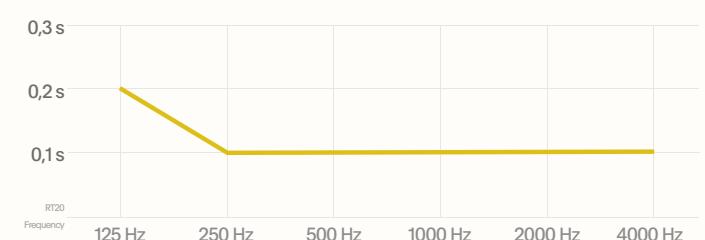


## PACKING

- Space S is delivered in a wooden case:


W 2300 x D 850 x H 1300 mm



## TECHNICAL SPECIFICATIONS

POWER CONSUMPTION	LIGHTING
 <p>Standby: 4,5 W Working: 16 W (fans, LEDs) CE ✓RoHS 3 m cable</p>  <p>Max. power supply (exc. plugged receivers): 35 W Power supply voltage: 100 - 240 VAC (50/60Hz) Supply voltage for ventilation, lighting and addons: 12 - 24 V DC</p>	 <p>Power: 6 W Brightness: 307 lx (615 lm at source) Light color temp.: 4000K</p>  <p>Fans and light activated by occupancy sensor</p>
FANS PERFORMANCE	GLASS PROPERTIES PER EN 410
 <p>Airflow: 63 m<sup>3</sup>/ hour</p>  <p>Fan emitted noise level in L<sub>Aeq</sub> Inside ≤ 39 db Outside ≤ 35 dB</p>  <p>The level of outside noise measured at a distance of 1.5 meters. The Space series achieves one of the best results on the market.</p> <p>External fan noise is comparable to one in typical open offices (&lt;45 dB) and will create an acoustic background for employees nearby.</p>	 <p>Light transmission: 87 Light reflection: 8 Solar energy transmittance: 70 Reflection of solar radiation: 7 Total solar energy transmittance: 76</p>
STANDARD EQUIPMENT	HEALTH AND SUSTAINABILITY COMPLIANCES
 <p>Ventilation system</p>  <p>Electric socket<sup>1</sup></p>  <p>Wall-mounted tabletop</p>	 <p>Formaldehyde and VOC safe: EU E1 Standard Quality management system of ISO 9001 Environmental management system of ISO 14001 FSC Certificate No. C161812</p>

## OPTIONAL ADDONS

 <p>USB A+C port<sup>2</sup> integrated in the tabletop</p>	 <p>Induction charger<sup>2</sup> integrated in the tabletop</p>
 <p>LAN connection<sup>3</sup> with 10 m wire</p>	 <p>Light and ventilation control panel</p>
 <p>Height-adjustable stool with footrest</p>	 <p>Wall-mounted back support</p>
 <p>Integrated wheels for easy relocation</p>	 <p>Right-handed door opening</p>



<sup>1</sup> Socket type E is installed as standard. Other electrical type should be requested.<sup>2</sup> Electric socket, USB ports and induction charger are available only in black.<sup>3</sup> An optional 10 m LAN cable is set with a main power wire.

## OPTIONAL EQUIPMENT'S DIMENSIONS mm



## SHAPE AND DIMENSIONS mm

+/- 3 mm

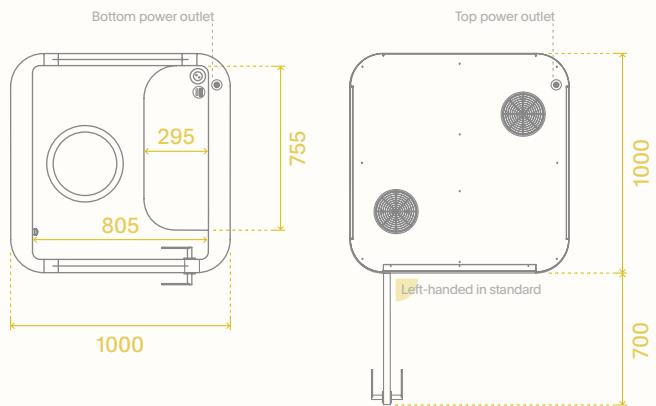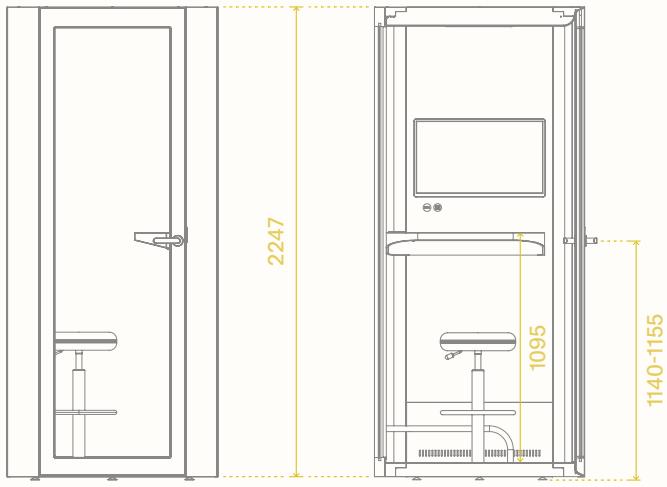

## DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	1000	1000 +700 mm with open door	2247 +20 mm for leveling
Internal	805	887	2080

## WEIGHTS kg

	NET	GROSS
	360	483 including wooden case and packaging parts

## COMPOSITION

The construction of Space S is the effect of work of our acoustics, technology and design departments. Walls of Space S pod are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials      • Felt      • Isolating materials
- Metal covers      • Plywood      • Soundproof glass


## USAGE

- Open space      • Call center      • Library
- Reception      • Breakout area
- Other public spaces (including railway stations and airports)


## CARE

- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

## AVERAGE SOUND INSULATION

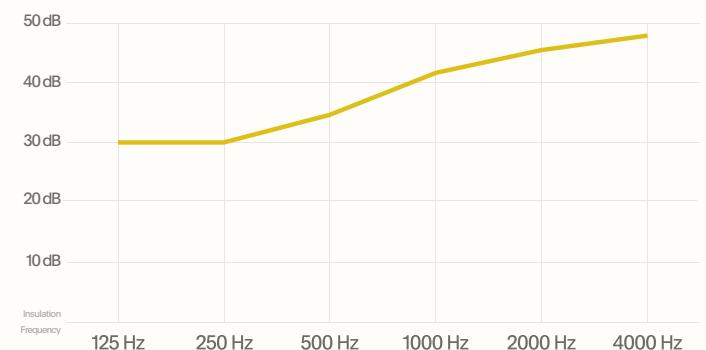


## RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

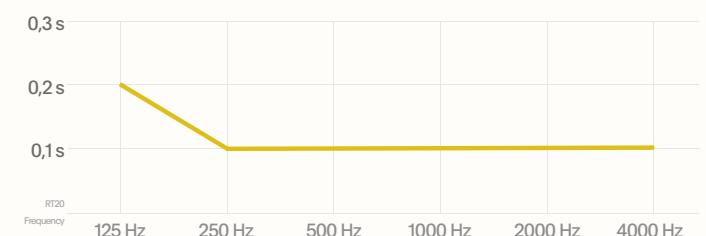

## PACKING

- Space S is delivered in a wooden case:

W 2300 x D 850 x H 1300 mm



## TECHNICAL SPECIFICATIONS

POWER CONSUMPTION	LIGHTING
 <p>Standby: 4,5 W Working: 16 W (fans, LEDs) CE, RoHS, 3 m cable</p>  <p>Max. power supply (exc. plugged receivers): 35 W Power supply voltage: 100 - 240 VAC (50/60Hz) Supply voltage for ventilation, lighting and addons: 12 - 24 V DC</p>	 <p>Power: 6 W Brightness: 307 lx (615 lm at source) Light color temp.: 4000K</p>  <p>Fans and light activated by occupancy sensor</p>
FANS PERFORMANCE	GLASS PROPERTIES PER EN 410
 <p>Airflow: 63 m<sup>3</sup> / hour</p>  <p>Fan emitted noise level in L<sub>Aeq</sub> Inside ≤ 39 db Outside ≤ 35 dB</p>  <p>The level of outside noise measured at a distance of 1.5 meters. The Space series achieves one of the best results on the market. External fan noise is comparable to one in typical open offices (&lt;45 dB) and will create an acoustic background for employees nearby.</p>	 <p>Light transmission: 87 Light reflection: 8 Solar energy transmittance: 70 Reflection of solar radiation: 7 Total solar energy transmittance: 76</p>

## STANDARD EQUIPMENT



 Ventilation system	 LED Light	 Occupancy sensor
 Electric socket <sup>1</sup>	 Graphite carpet	 Wall hook max load 5 kg
 Wall-mounted tabletop	 USB and HDMI ports for video <sup>2</sup>	 USB A+C port <sup>2</sup>
 Height-adjustable stool with footrest	 Wall-integrated monitor bracket	

## OPTIONAL ADDONS


 LAN connection <sup>3</sup> with 10 m wire	 Light and ventilation control panel
 Integrated wheels for easy relocation	 Right-handed door opening

<sup>1</sup> Socket type E is installed as standard. Other electrical type should be requested.<sup>2</sup> Electric socket, HDMI and USB ports are available only in black.<sup>3</sup> An optional 10 m LAN cable is set with a main power wire.

## EQUIPMENT DIMENSIONS mm

 Height-adjustable stool with footrest in Remix3	 Wall-integrated bracket with VESA 75 & 100 plate
12 kg Total weight	24" Recommended screen size
✓ Centrally floor-integrated	27" Maximum screen size
 	

## FINISHES

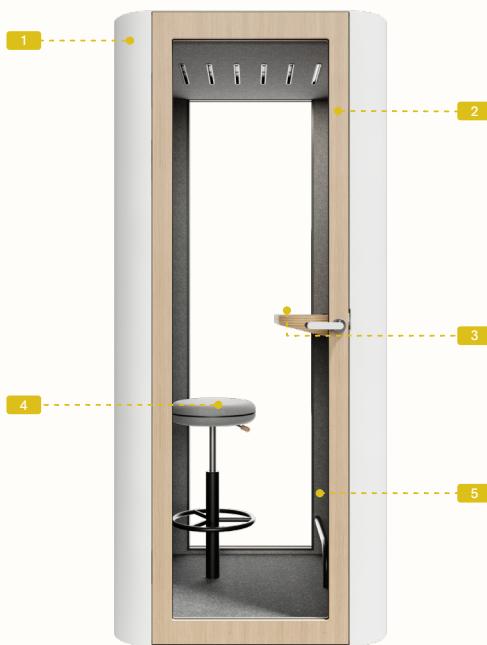

## 1 EXTERNAL WALLS AND ROOF PAINT COLOURS

STANDARD	Snow White Ultra Matt RAL 9003
	Powder Grey Ultra Matt RAL 7035
	Pepper Grey Ultra Matt RAL 7012
EXTRA	Ceramic Red Ultra Matt NCS S 4050-Y70R
	St. Tropez Yellow Ultra Matt RAL 1018
	Custom colour From RAL palette
	New York Grey Ultra Matt NCS S 3000-N
	Panther Black Ultra Matt RAL 9005
	Dusk Blue Ultra Matt NCS S 4010-B50G
	Whiteboard White Glossy Anti-graffiti coating

## 2 EXTERNAL FRAME LAMINATES &amp; VENEERS

STANDARD	Snow White NCS S 0500-N
	Powder Grey NCS S 1502-G
	New York Grey NCS S 3000-N
	Dusk Blue NCS S 4010-B50G
	Ceramic Red NCS S 4050-Y70R
EXTRA	Whiteboard White Glossy 9417-HW
	Black Premium Anti-fingerprint 0720
	Maple Wood
	Oak Wood

## 3 INTERNAL TABLETOP LAMINATES &amp; VENEERS

STANDARD	Snow White NCS S 0500-N
	Powder Grey NCS 1502-G
	New York Grey NCS S 3000-N
	Dusk Blue NCS S 4010-B50G
	Ceramic Red NCS S 4050-Y70R
EXTRA	Grey Premium Anti-fingerprint 0725
	Black Premium Anti-fingerprint 0720
	Maple Wood
	Oak Wood

## 4 INTERNAL STOOL/BACK SUPPORT FABRIC

KVADRAT REMIX 3	0422	0452	0566	0906
	0242	0123	0136	0133
	0152	0173		

## 5 INTERNAL FELT LININGS

Beige
Grey
Dark Grey



Space S / **MUTE.**

