

AKOESTIEKLABEL

AK 2 PET Felt Workplace Divider Lamp - Standing



- made from recycled PET bottles
- reinforced with acoustic filling
- also available in a hanging format
- includes two LED tubes
- suitable for contract use

Colours

Shell



Feet

Standard	RAL 9011 (Black) / RAL 9010 (White) with 30% gloss degree
Custom	Any RAL colour with 70% gloss degree
Fine texture*	RAL 1012 (Yellow) / RAL 3005 (Pink) RAL 5008 (Marine) / RAL 5020 (Turquoise) / RAL 6007 (Dark Green) RAL 6020 (Green) / RAL 7015 (Dark Grey) / RAL 7033 (Olive) RAL 7044 (Beige) / RAL 7045 (Light Grey) / RAL 8014 (Brown) RAL 9011 (Graphite Black)

*Fine texture finishes are ton sur ton with PET Felt colours.

Specifications



Voltage	220-240V
Frequency	50-60 Hz
IP Rating	IP20
Socket	2 x G13

AK 2 serves multiple functions, offering dual workspace lightning and desk partitioning. The rounded PET felt shell grants the lamp its friendly appearance and soft texture. Reinforced with acoustic filling, it also provides a gentle sound-dampening effect. AK 2 comes with steel feet, allowing to place it directly on the tabletop. The lamp is available in 11 PET Felt colour blends and suitable for shared desks in offices, co-working spaces and schools.

Designed by **Ivan Kasner & Uli Budde**

Product overview

Weight
8.5 kg

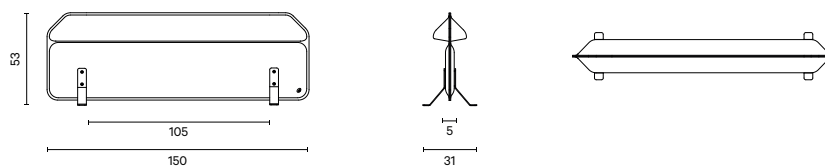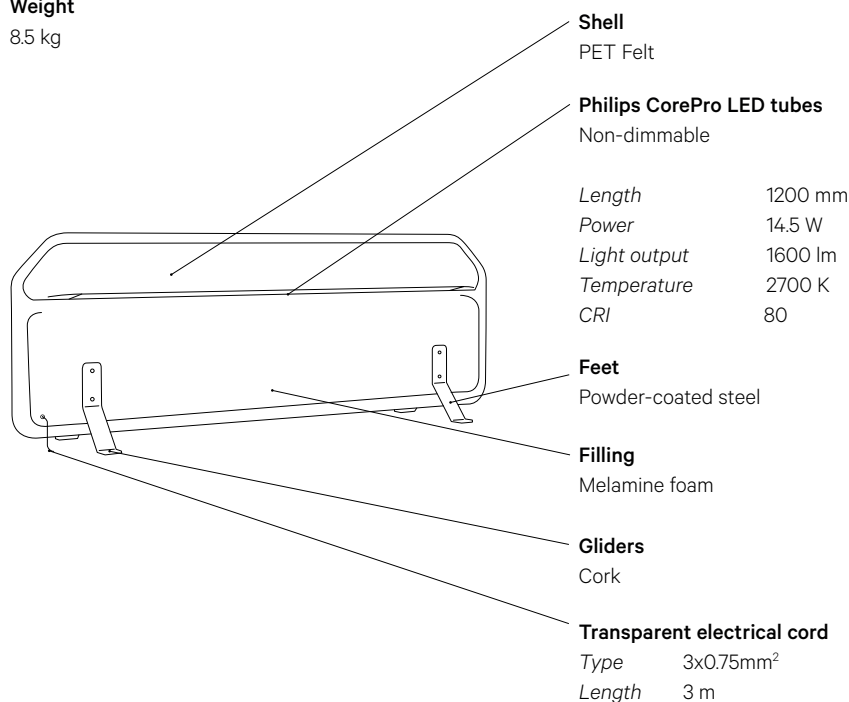

Care & Maintenance

Due to its porous structure, PET Felt can be easily cleaned with water. To remove most stains, it is sufficient to apply a copious amount of water and let it drip through. Do not rub the PET felt surface to avoid excessive pilling. If water is not sufficient, stubborn stains can be removed with professional cleaning products like the James cleaning set.

Downloads

3D files, technical drawings and Hi-Res images are available in the [Download Library](#) at [devorm.nl](#)

Additional information

You can find further maintenance recommendations, warranty terms and corporate information in the [Information bank](#) at [devorm.nl](#)

AKOESTIEKLABEL

AK 2 PET Felt Workplace Divider Lamp - Hanging



- made from recycled PET bottles
- reinforced with acoustic filling
- also available in a standing format
- cable length can be customised
- includes two LED tubes
- suitable for contract use

Colours

Shell



Fixture

Standard	RAL 9011 (Black) / RAL 9010 (White) with 70% gloss degree
Custom	Any RAL colour with 70% gloss degree
Fine texture*	RAL 1012 (Yellow) / RAL 3005 (Pink) RAL 5008 (Marine) / RAL 5020 (Turquoise) / RAL 6007 (Dark Green) RAL 6020 (Green) / RAL 7015 (Dark Grey) / RAL 7033 (Olive) RAL 7044 (Beige) / RAL 7045 (Light Grey) / RAL 8014 (Brown) RAL 9011 (Graphite Black)

*Fine texture finishes are ton sur ton with PET Felt colours.


Specifications

Voltage	220-240V
Frequency	50-60 Hz
IP Rating	IP20
Socket	2 x G13

AK 2 serves multiple functions, offering dual workspace lightning and desk partitioning. The rounded PET felt shell grants the lamp its friendly appearance and soft texture. Reinforced with acoustic filling, it also provides a gentle sound-dampening effect. AK 2 is ceiling-suspended and available in 11 PET Felt colour blends, offering many design possibilities. Suitable for shared desks in offices, co-working spaces and schools.

Designed by **Ivan Kasner & Uli Budde**

Product overview

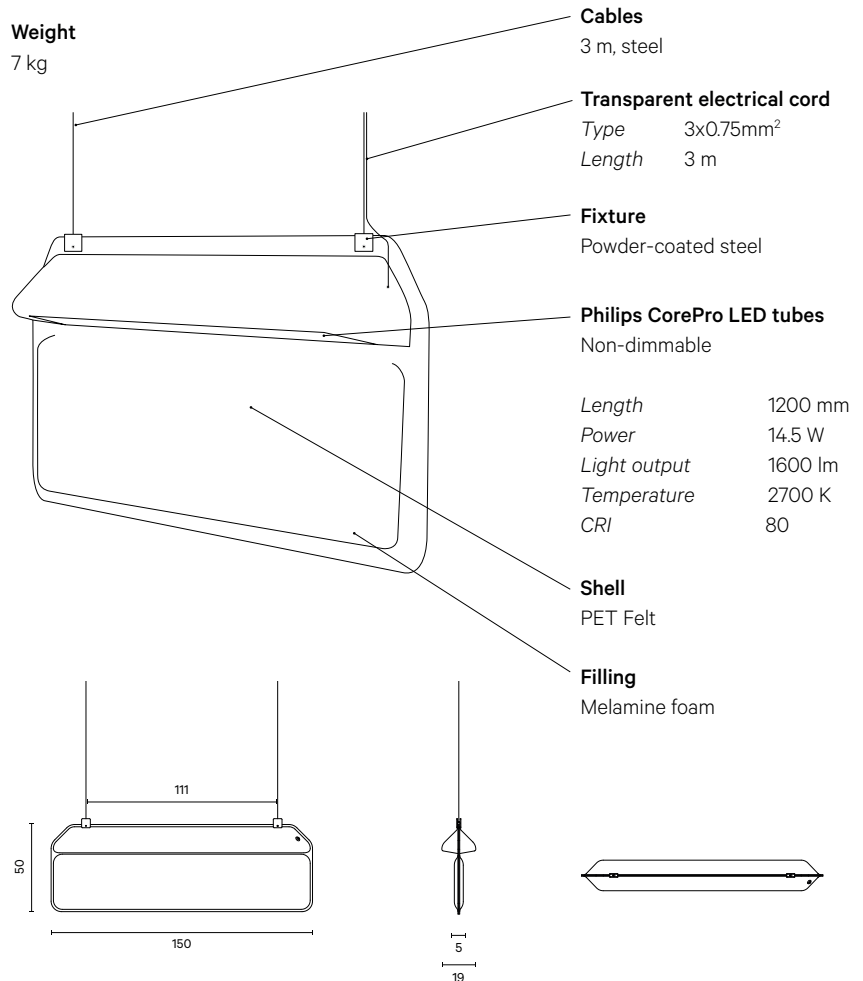

Care & Maintenance

For regular care, we recommend dusting or vacuuming PET Felt occasionally. Most stains can be easily cleaned with water. It is advised to dab the contaminated surface with a dry cloth while it is wet. Do not rub PET Felt to avoid excessive pilling and let the material dry naturally. If water is not sufficient, stubborn stains can be removed with professional cleaning products like the James cleaning set.

Downloads

3D files, technical drawings and Hi-Res images are available in the [Download Library](#) at [devorm.nl](#)

Additional information

You can find further maintenance recommendations, warranty terms and corporate information in the [Information bank](#) at [devorm.nl](#)