


AKOESTIEKLABEL

FREQUENCY

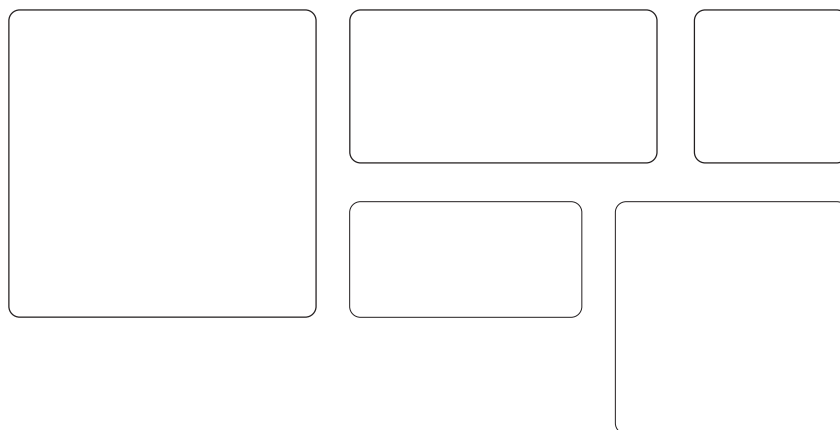

HEIGHT	80 CM	80 CM	60 CM	60 CM	40 CM
WIDTH	80 CM	40 CM	60 CM	30 CM	40 CM
TOTAL DEPTH	4/8/12 CM	4/8/12 CM	4/8/12 CM	4/8/12 CM	4/8/12 CM
WEIGHT	5,5/6,5/8 KG	2,5/3/4 KG	3/4/5 KG	1,5/2/2,5 KG	1,5/1,7/2 KG

MATERIAL

Ecophon Inside

Back piece in MDF-board

Suspension with wooden beam is standard

Fabric

OPTIONS

Magnets for mounting, neodym 4 x ø20 x 6 mm

200 cm wooden beam when installing several panels in width
(not in combination with magnets)

ACOUSTIC PROPERTIES

Frequency in Hz

63	125	250	500	1000	2000	4000	Aw
0,02	0,17	0,62	1,16	1,16	1,09	1,01	0,95

Absorption Class A

Tested according to ISO 354 och ISO 11654

FIRE TEST

Frequency is tested according to EN ISO 11925-2

UPHOLSTERY MATERIAL

The fabrics for our sound absorbers are carefully selected and tested according to the standard set by all the manufacturers.

PG0


Camira	Cara
Camira	Carlow
Camira	Fiji
Gabriel	Event Screen
Gabriel	Hush

PG1

Camira	Blazer Lite
Gabriel	Soul
Gabriel	Soul Solange
Gabriel	Thrill
Gabriel	Twist
Gabriel	Twist Melange
Gabriel	Xpress (2,0)
Kvadrat	Floyd Screen

MOUNTING


Suspension with
wooden beam 4 pcs
(standard)



Wooden beam wall 1 pcs



Suspension with
magnets 4 pcs
(optional)



DECIBEL
by JOHANSON

www.decibelab.se